Model: ST2 Series Automatic Labeler System 2-Sided Front and Back System -Optional Round Bottle Wrap Unit



U.S. PACKAGING EQUIPMENT, LLC



- Compatible with our ST600, ST1100, ST2100, and PA4000 automatic label applicators.
- Capable of running at speeds of up to 600, 1100, or 2100 linear inches per minute, respectively.
- Heavy duty construction specifically designed for industrial applications.
- Stainless steel and anodized aluminum provide protection from corrosive environments.
- Solid construction ensures even product handling resulting in extremely accurate label placement.
- Fully adjustable I/O mounts permit the applicator head to be oriented at any attitude for side, top or bottom label placement.
- Handles a wide assortment of product and label sizes.

Standard front/back systems come complete with an 8-foot by 6-inch chain link conveyor, a powered top hold down, dual applicator head I/O mounts, a microprocessor controller hung from an articulator arm, quide rails, and a spacer wheel assembly. The conveyor height is fully adjustable between 32 and 39 inches and capable of handling products up to 6-inches wide. Each conveyor system includes heavy duty construction, robust locking casters, vertical, horizontal and swivel adjustments for applicator head mounting and a heavy duty

1-horsepower adjustable

speed motor.






U.S. PACKAGING EQUIPMENT, LLC

1464 Market Circle, Port Charlotte FL 33953 www.uspackagingequipment.com sales@uspackagingequipment.com Phone: 708-990-9081

Model: ST2 Series Automatic Labeler System 2-Sided Front and Back System -Optional Round Bottle Wrap Unit



U.S. PACKAGING EQUIPMENT, LLC

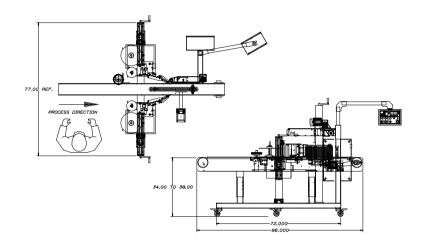

Applicator System Specifications

Speed:	600/1100/2100/3100 linear inches per minute
Accuracy:	+/- 1/32 of an inch with consistent product dimensions
Control Electronics:	Microprocessor controlled
Label Size:	Minimum: 1/2-inch by 1/2-inch Maximum: 6-1/2" by 18.00"
Electrical:	110 VAC, 50/60 Hertz, 15 Amps
Product Detection:	Photoelectric
Label Capacity:	6-1/2″ Web Width, 12-inch/16-inch/18-inch diameter label roll capacity with a 3-inch core
Options:	Stainless Steel Base Stainless Steel Wash Down Optional Wrap Station 3/4/5 Panel Station Optional Conveyor Lengths and Widths Dual Powered Alignment Belts Error/Warning Light Pole Secondary Impression Kits Custom Product Handling Gap Transporter Belts

U.S. PACKAGING EQUIPMENT, LLC

1464 Market Circle, Port Charlotte FL 33953 sales@uspackagingequipment.com www.uspackagingequipment.com

Phone: 708-990-9081